


## White Tulip Wall-mounted toilet HygieneFlush # 2576092000

| < 370 mm > |

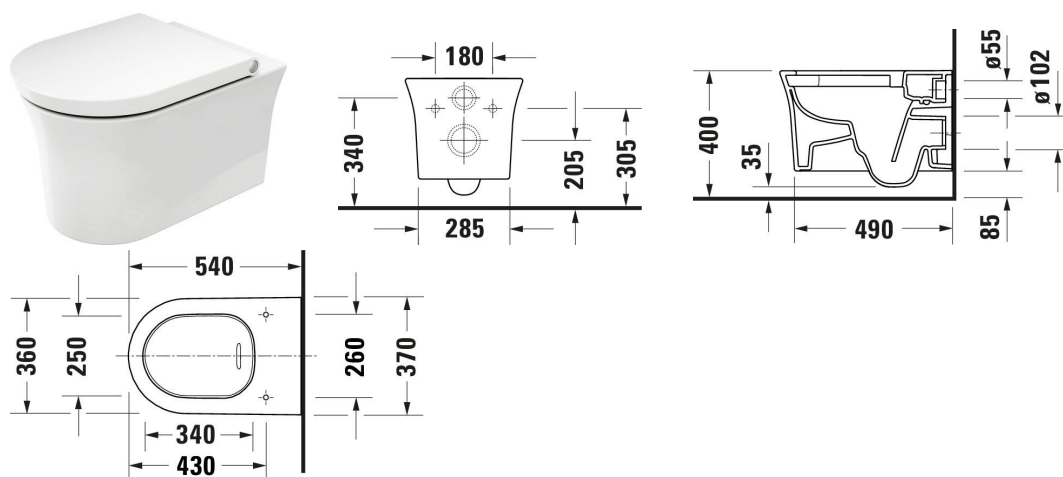

| Wall-mounted toilet HygieneFlush                                                                                                                                                             | Dimension    | Weight    | Order number |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|--------------|
| Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Rimless, Flush principle: washdown model, Outlet drain horizontal, Incl. invisible fixation, Unified Water Label (UWL) Class: 1 |              |           |              |
| <b>Colors</b>                                                                                                                                                                                |              |           |              |
| 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)                                                                                               |              |           |              |
| <b>Variant</b>                                                                                                                                                                               |              |           |              |
| White High Gloss, HygieneGlaze                                                                                                                                                               | 370x365 mm   | 25.000 kg | 2576092000   |
| <b>Infobox</b>                                                                                                                                                                               |              |           |              |
| Not available in Wondergliss                                                                                                                                                                 |              |           |              |
| <b>Accessory for ceramics</b>                                                                                                                                                                |              |           |              |
| Fixation Suitable for Wall-mounted bidet, Wall-mounted toilet                                                                                                                                | Ø 12 mm      | 0.69 kg   | 006500       |
| <b>Accessory</b>                                                                                                                                                                             |              |           |              |
| Noise reduction set                                                                                                                                                                          | 420 x 390 mm | 0.2 kg    | 005090       |
| <b>Suitable products</b>                                                                                                                                                                     |              |           |              |

## White Tulip Wall-mounted toilet HygieneFlush # 2576092000

|< 370 mm >|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------|
| <p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p>                                                                                                  | 500 x 155 mm | WD1011 |
| <p>Toilet seat Soft-closing: Yes, Removable Seat, Hinge material: Stainless steel, 372 x 466 mm</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 372 x 466 mm | 002709 |
| <p>Installation element dry installation for WC Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p>                                                                                           | 500 x 155 mm | WD1013 |
| <p>Installation element dry installation for WC Odour extraction, Fan activation: Automatic, Manual, At the touch of a button, Touchless, Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p> | 500 x 155 mm | WD1014 |
| <p>Installation element wet installation for WC Type of installation: For walling in and out, Type of mounting: Wet installation, Max. projection toilet: 700 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, 445 x 153 mm</p>                                                                                                                                                                                                                                                                                                           | 445 x 153 mm | WD1015 |
| <p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p>                                                                                               | 500 x 155 mm | WD1016 |
| <p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p>                                                                                                  | 500 x 155 mm | WD1017 |

## White Tulip Wall-mounted toilet HygieneFlush # 2576092000

| < 370 mm > |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |              |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------|
| <p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p> | 500 x 155 mm | WD1018 |
| <p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p>    | 500 x 155 mm | WD1019 |
| <p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height adjustable: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, Small flushing volume: 3 l, Large flushing volume: 6 l, 500 x 155 mm</p>       | 500 x 155 mm | WD1020 |

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*