


D-Code Toilet close-coupled # 211809..002 / 211809..002

| < 355 mm > |

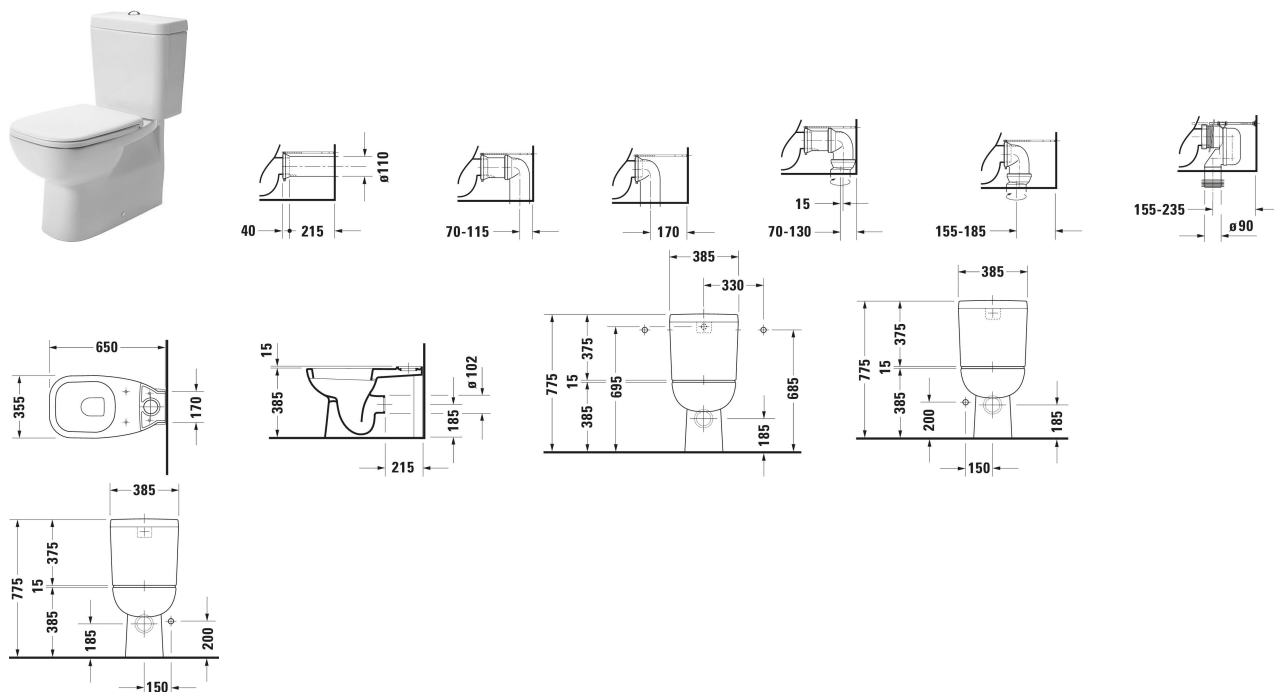

Toilet close-coupled	Dimension	Weight	Order number
Flush water quantity: 6/3 l, Washdown model, Flushing rim: Semi-open, Outlet drain: horizontal, Position outlet: Back, Incl. cistern: No, Flush principle: washdown model, For bowl mounted cistern, Length adjustable, Incl. mounting material, Unified Water Label (UWL) Class: 2			
Colors			
00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
♦ White High Gloss, Flush water quantity: 6 l, Outlet dimensions for Vario connecting bend vertical: 155 mm - 235 mm, Outlet dimensions for Vario outlet set vertical/horizontal: 70 mm - 185 mm	355x400 mm	24.500 kg	211809..002
♦ White High Gloss, HygieneGlaze, Flush water quantity: 6 l, Outlet dimensions for Vario connecting bend vertical: 155 mm - 235 mm, Outlet dimensions for Vario outlet set vertical/horizontal: 70 mm - 185 mm	355x400 mm	24.500 kg	211809..002
Accessory			
Vario connecting bend Diamter of inlet: 75 mm, Diameter drain: 90 mm	351 x 134 mm	0.87 kg	899025
Connector Set Outlet drains	397 x 397 mm	1.29 kg	001422

D-Code Toilet close-coupled # 211809..002 / 211809..002

|< 355 mm >|

Suitable products		
Toilet seat Soft-closing: Yes, Hinge material: Plastic, 359 x 443 mm	359 x 443 mm	006739
Toilet seat Soft-closing: No, Hinge material: Stainless steel, 360 x 430 mm	360 x 430 mm	006731
Cistern Flush water quantity: 6/3 l, Incl. mechanism, Dual Flush, Water connection position: Right, Left 3/8", Surface of push button: Chrome, Concealed connection, Unified Water Label (UWL) Class: 2, 390 x 175 mm	390 x 175 mm	094000
Cistern Flush water quantity: 6/3 l, Incl. mechanism, Dual Flush, Water connection position: Bottom left 3/8", Surface of push button: Chrome, Concealed connection, Unified Water Label (UWL) Class: 2, 390 x 175 mm	390 x 175 mm	094010

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.